

# RM 110



## INTER-ROW MOWER RM110

# C2M

CONCEPT




# A VERSATILE TOOL

Our RM inter-row mower is particularly versatile because it can be adapted to the cutting method you want.

The combination of wire and chain allows the inertia of the chain to be combined with the finesse of the wire. This method respects the tree, the soil and the irrigation system during the work.

It is also possible to choose to equip our mower with knives.

Our mower consists of two vertical rotors forming a wide cutting deck to combine efficiency and speed.



**Choice of cutting method: combined wire/chain or knives**



**Double rotor to significantly increase speed and accuracy**



**Rear or front hitch mounting, with the possibility of adapting to a belly mount**



**Head mounted on a slide that can be shifted by 900mm to reach the lowest orchards**



**Hydraulic power pack with double pump, 60 litres/min in total, and oil cooler with reversal of the direction of rotation to allow work without risk of heating in difficult conditions (dust, pollen)**


# TIME-SAVING AND CONFORTABLE TO WORK WITH

Our innovative mower has three ways of folding its cutting head:

- Manual folding using a button on the joystick.
- Folding in direct contact with the shaft thanks to a nitrogen ball mounted on the cylinder which allows the head to return to its position.
- Folding with a shaft position sensor. This allows a considerable increase in working speed without the risk of breakage due to shaft impact.

The RM can be adapted to any orchard size thanks to its articulated slide. This makes this tool an ally on all your crops.

It is operated by an intuitive joystick: row maintenance has never been so quick and easy.

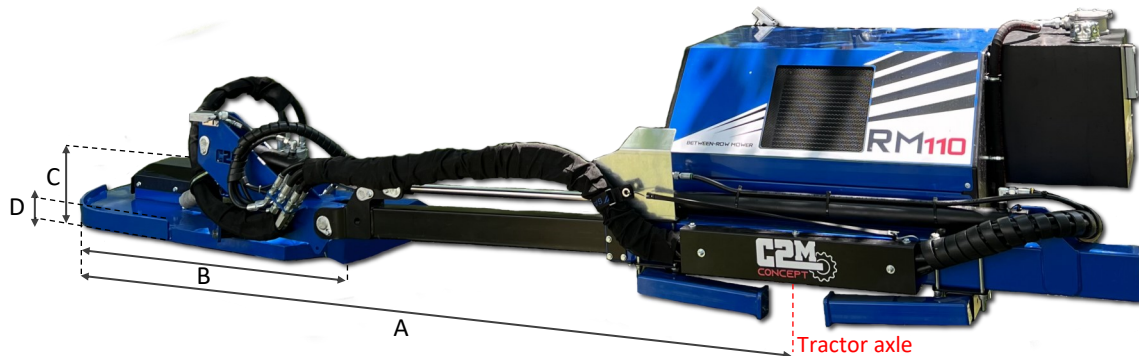

- A) Max. length unfolded: 3000mm and min. length folded: 2100mm
- B) Cutting head length: 1100mm
- C) Height of cutting head to deck: 330mm
- D) Height of cutting deck: 200mm



# TECHNICAL CHARACTERISTICS



|                |              |
|----------------|--------------|
| WORKING WIDTH  | 1100mm       |
| WORKING SPEED  | 1 to 7 Km/h  |
| EXTENDABLE ARM | Up to 900mm  |
| HYDRAULIC FLOW | 60 l/min     |
| PTO REGIME     | 540/1000 rpm |
| CONTROLS       | By joystick  |

## OPTIONS

Hydraulic power plant  
(pumps and tank)

Front, rear or belly mounted

Choice of cutting method  
(combined wire/chain or knives)

Double towing kit (front and rear) easily

# PHOTO GALLERY



DOUBLE HITCH KIT OPTION

# CONTACT

04 56 33 74 54

contact@c2m-concept.com

597 Chemin de Montessut  
38470 BEAULIEU



SAS C2M



@sas.c2m



SAS C2M

